

MPM281 High Stable Piezoresistive OEM Pressure Sensor

Sold in North America by:
Servoflo Corporation
75 Allen Street Lexington, MA 02421
Tel: 781-862-9572
www.servoflo.com / info@servoflo.com



Features

- Pressure range 0~20kPa...100MPa
- Gauge, absolute, sealed gauge
- Constant current / constant voltage power supply
- Isolated construction, enable to measure various media
- $\Phi 19\text{mm}$ standard OEM pressure sensor
- Full stainless steel 316L
- Wide temperature compensation $-10^{\circ}\text{C} \sim 80^{\circ}\text{C}$
- Long-term stability $\pm 0.1\%\text{FS}/\text{year}$

Application

- Industrial process control
- Level measurement
- Gas, liquid pressure measurement
- Pressure checking meter
- Pressure calibrator
- Liquid pressure system and switch
- Cooling equipment and air conditioning system
- Aviation and navigation inspection

Introduction

MPM281 high stable OEM sensor is the piezoresistive pressure sensor with isolated construction and precise compensation. It uses high stable silicon die, stainless steel 316L housing with diameter $\Phi 19\text{mm}$. Wider temperature compensation and zero correction are calibrated by laser trimming technics. The measured pressure is transmitted onto silicon die through 316L diaphragm and inner media, to transform the pressure to electric signal.

MPM281 pressure sensor is inspected and screened on automatic production line, testing and checking time after time strictly. It is widely used for various pressure measurement fields.

Electrical Performance

- Power supply: $\leq 2.0\text{mA DC}$; $\leq 10\text{V DC}$
- Electrical connection: $\phi 0.5\text{mm}$ Kovar pin or 100mm silicon rubber flexible wires
- Common mode voltage output: 50% input (typ.)
- Input impedance: $2\text{k}\Omega \sim 6\text{k}\Omega$
- Output impedance: $3.5\text{k}\Omega \sim 6\text{k}\Omega$
- Response (10%~90%): $< 1\text{ms}$
- Insulation resistor: $100\text{M}\Omega$, 100VDC
- Overpressure: 1.5 times FS

Construction Performance

- Diaphragm: stainless steel 316L
- Housing: stainless steel 316L
- Pressure leading tube : stainless steel 316L
- Pin: Kovar
- O-ring: Viton
- Net weight: $\sim 16\text{g}$

Environment Condition

- Shock: no change at 10gRMS, (20~2000)Hz
- Impact: 100g, 11ms
- Media compatibility: the gas or liquid which is compatible with stainless steel and Viton

Basic Condition


- Media temperature: (35±1)°C
- Environment temperature: (35±1)°C
- Shock: 0.1g(1m/s²)Max
- Humidity: (50%±10%)RH
- Local air pressure: (86~106)kPa
- Power supply: (1.5±0.0015)mADC

Specification

Item*	Min.	Typ.	Max.	Units
Linearity		±0.15	±0.20	%FS,BFSL
Repeatability		±0.05	±0.075	%FS
Hysteresis		±0.05	±0.075	%FS
Zero output			±2	mV DC
FS output **	70			mV DC
Zero thermal error***		±0.75	±1.0	%FS,@35°C
Span thermal error		±0.75	±1.0	%FS,@35°C
Compensated temp. range	-10~80 0~70(7kPa,20kPa,35kPa)			°C
Working temp. range	-40~125			°C
Storage temp. range	-40~125			°C
Stability error		±0.1	±0.2	%FS/year


*testing at basic condition
 ** for range code 0C, FS output ≥45mV
 ***for rang code 0C, Zero thermal error≤1.5%FS

Outline Construction (Unit: mm)

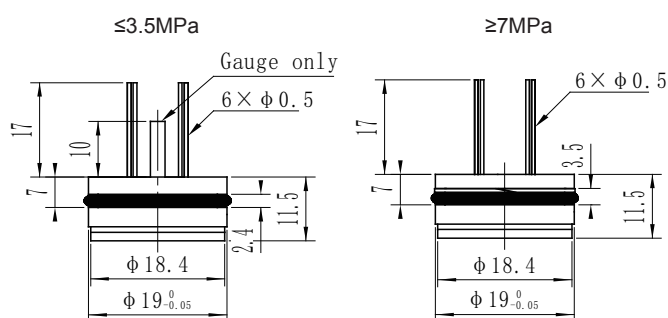

The suggested installation dimension is $\phi 19^{+0.05}_{-0.02}$ mm

Electrical Connection

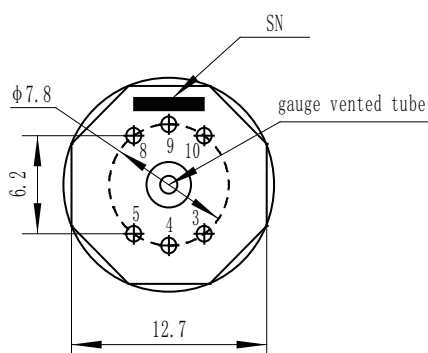

Pin	Wire color	Definition
4	Blue	-OUT
5	Yellow	-IN
8	Black	+IN
9	Red	+OUT
For range 02/03/17/18/19/20		

Pin	Wire color	Definition
4	Red	+OUT
5	Yellow	-IN
8	Black	+IN
9	Blue	-OUT
For other range		

The actual electrical connection method, please check the parameter label enclosed with products.

Order Guide

MPM281		High Stable Piezoresistive OEM Pressure Sensor					
		Range code	Pressure range	Ref.	Range code	Pressure range	Ref.
		0C	0kPa~7kPa	G	12	0MPa~2MPa	G.A
		0B	0kPa~20kPa	G	13	0MPa~3.5MPa	G.A.S
		0A	0kPa~35kPa	G.A	14	0MPa~7MPa	S.A
		02	0kPa~70kPa	G.A	15	0MPa~10MPa	S.A
		03	0kPa~100kPa	G.A	17	0MPa~20MPa	S.A
		07	0kPa~200kPa	G.A	18	0MPa~35MPa	S.A
		08	0kPa~350kPa	G.A	19	0MPa~70MPa	S.A
		09	0kPa~700kPa	G.A	20	0MPa~100MPa	S.A
		10	0kPa~1000kPa	G.A			
		Code	Pressure type				
		G	Gauge				
		A	Absolute				
		S	Sealed gauge				
		Code	Pressure connection				
		0 or null	O-ring				
		Code	Compensation				
		L	Laser trimming				
		M	Outer compensated resistor (providing resistor value)				
		Code	Electrical connection				
		1	Kovar pin(default)				
		2*	100mm silicon rubber flexible wires				
		Code	Special measurement				
		Y	Gauge sensor to measure vacuum				
MPM281		07	G	0	L	1	Y the whole spec

*The default code for electrical connection is "1" on the parameter card. And it is also allowed to print code "1" if the electrical connection is flexible wire (original code "2"). The wire length shall be as per customers' request on the contact.

Notes

- 1.It is recommended that the sensor should be installed as Suspended Mode to avoid face type seal and avoid affecting sensor stability.
- 2.Please pay attention to protect the diaphragm and the compensated board to prevent any damage or bad performance.
- 3.Temperature resistant range of standard Viton O-ring of sensor is -20°C ~250°C . When working temperature is lower than -20°C , or sensor is applied in critical environment, please contact us.